

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Attorney Docket No.: 106815

Date: November 24, 2000

BOX PATENT APPLICATION

NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): MECHANISMS FOR WEB-OBJECT EVENT/STATE-DRIVEN COMMUNICATION
BETWEEN NETWORKED DEVICES

By (Inventors): Henry G. Pajak, Gavan L. Tredoux and Highland Mary Mountain


- ☒ Formal drawings (Figs. 1-14; 14 sheets) are attached.
☒ A Declaration and Power of Attorney is filed herewith.
☒ An assignment of the invention to XEROX CORPORATION is filed herewith.
☒ An Information Disclosure Statement is filed herewith.
☒ A Preliminary Amendment is filed herewith.
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____.--
☒ The filing fee is calculated below:

CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 710
TOTAL CLAIMS	15 - 20	= 0*	x 18	\$
INDEP CLAIMS	1 - 3	= 0*	x 80	\$
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED			+ 270	\$
* If the difference is less than zero, enter "0".			TOTAL	\$ 710

- ☒ Please charge Deposit Account No. 24-0037 in the amount of \$710.00. Two duplicate copies of this sheet are enclosed.
☒ The Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 24-0037. Two duplicate copies of this sheet are attached.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Klifton L. Kime
Registration No. 42,733

JAO:KLK/mgs

Inventor Information

Inventor One Given Name:: Henry G.
 Family Name:: Pajak
 Name Suffix::
 City of Residence::
 State or Prov. of Residence::
 Country of Residence::
 Inventor Two Given Name:: Gavan L.
 Family Name:: Tredoux
 Name Suffix::
 City of Residence::
 State or Prov. of Residence::
 Country of Residence::
 Inventor Three Given Name:: Highland Mary
 Family Name:: Mountain
 Name Suffix::
 City of Residence::
 State or Prov. of Residence::
 Country of Residence::
 Inventor Four Given Name::
 Family Name::
 Name Suffix::
 City of Residence::
 State or Prov. of Residence::
 Country of Residence::
 Inventor Five Given Name ::
 Family Name::
 Name Suffix::
 City of Residence::
 State or Prov. of Residence::
 Country of Residence::

Correspondence Information

Name Line One:: Oliff & Berridge PLC
 Address Line One:: P.O. Box 19928
 City:: Alexandria
 State or Province:: VA
 Postal or Zip Code:: 22320
 Telephone:: (703) 836-6400
 Fax:: (703) 836-2787
 Electronic Mail:: commcenter@oliff.com

Application Information

Title Line One:: MECHANISMS FOR WEB-OBJECT
 Title Line Two:: EVENT/STATE-DRIVEN COMMUNICATION
 Title Line Three:: BETWEEN NETWORKED DEVICES

Title Line Four::
Total Drawing Sheets:: 14
Docket Number:: 106815

Continuity Information

>This application is a::
Application One::
Filing Date::
Patent Number::
which is a::
>>Application Two::
Filing Date::
Patent Number::

Prior Foreign Applications

Foreign Application One::
Filing Date::
Country::
Priority Claimed::
Foreign Application Two::
Filing Date::
Country::
Priority Claimed::
Foreign Application Three::
Filing Date::
Country::
Priority Claimed::

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Henry G. Pajak, Gavan L. Tredoux and Highland Mary Mountain

Application No.: New U.S. Patent Application

Filed: November 24,2000

Docket No.: 106815

For: MECHANISMS FOR WEB-OBJECT EVENT/STATE-DRIVEN
COMMUNICATION BETWEEN NETWORKED DEVICES

PRELIMINARY AMENDMENT

Director of the U.S. Patent and Trademark Office
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:


Please amend the specification as follows:

Page 9, line 7, change "Provisional Application No. 60/154,016" to --Patent
Application No. 09/522,082--.

REMARKS

By this Preliminary Amendment, The specification is amended to correctly identify
the Information Disclosure Reference number. Prompt and favorable consideration on the
merits in respectfully solicited.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Klifton L. Kime
Registration No. 42,733

JAO:KLK/mgs

Date: November 24, 2000

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

<p>DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461</p>

004211 65431260

MECHANISMS FOR WEB-OBJECT EVENT/STATE-DRIVEN
COMMUNICATION BETWEEN NETWORKED DEVICES

BACKGROUND OF THE INVENTION

5 1. Field of Invention

This invention relates to concurrent communication between multiple devices on a network.

2. Description of Related Art

10 A wide variety of techniques are known for manipulating each of the individual technologies that exist in a Web-based concurrent system environment. For example, some techniques focus on the Web Client user interface. Other techniques focus on the simple network management protocol (SNMP) data that networked copiers, printers, facsimile machines and multifunction devices use to share their status and other data. Still other techniques focus on various methods of
15 communicating over the Internet or between programs, and on data analysis and processing for metrics.

In a concurrent networked device environment, where the data, state and actions being performed by many devices changes almost constantly and often simultaneously, an orderly set of rules, policies and mechanisms need to be in place to
20 interpret data and ensure that status information is reported efficiently. Copiers may run out of one or more supplies, billing data may need to be reported, operational alerts may need to issued regarding needed device repairs, network device supplies may need ordering when they become low and an order automatically created, the status of a device may need to be refreshed, accurate statistical information may need
25 to be generated, and/or appropriate metrics may need to be applied to help evaluate the data being used by many users and systems.

SUMMARY OF THE INVENTION

At the same time, the application technology, even though it may be Web-based, may need to span a variety of technologies where there is little uniformity
30 in rules or mechanisms. For example, the technology and practice of using a database differs considerably from that of Web-page generation, real-time simple network management protocol data gathering, or the rules and practices of state machines. Therefore, the expertise needed to construct an application integrating such various technologies could be excessively demanding.

This invention provides systems and methods that overcome much of the complexity associated with the many technologies, disciplines and/or operational considerations in a Web-based concurrent system environment.

5 This invention separately provides systems and methods that tie together the various disparate technologies in a simpler and more coherent manner than can be realized by the individual technologies alone.

This invention separately provides systems and methods that utilize Web objects in a Web-based concurrent system environment.

10 This invention separately provides systems and methods that automatically create one or more Web objects using state machines and event mechanisms. In various exemplary embodiments, the Web object state transitions are generated and transitioned in real-time. In various exemplary embodiments, the Web object state transitions and the actions that are within those state machines are executed independently of user interaction.

15 This invention separately provides systems and methods that improve the integrity of persistent Web objects to enable improved online and/or offline updating of data pertaining to networked devices.

20 This invention separately provides systems and methods that allow many implementations in which one or more front-end Web servers or related systems manipulate a common persistent Web object while maintaining consistency and integrity of data in the common persistent Web object.

This invention separately provides systems and methods that use Web objects having template-driven mechanisms that simplify creation, dynamic modification and/or persistence of individual Web objects.

25 This invention separately provides systems and methods that use Web objects having event-driven mechanisms that enable concurrency, contention and atomicity rules to be applied between individual Web objects.

This invention separately provides systems and methods including Web-objects that use objects, state-machines, events and actions within states.

30 In various exemplary embodiments according to this invention, web-based concurrent systems and methods automate data collection, monitoring, analysis and/or metric creation independently of assembling and displaying status and data about enterprise networked copiers, printers, facsimile machines, multifunction devices and

09718493.112400

or any other known or later developed network-connectable device. Web pages displaying such status and data are assembled efficiently using Web objects.

In various exemplary embodiments, the systems and methods according to this invention gather and set internal and/or external status and device data from a multiplicity of networked devices, either asynchronously and/or synchronously, using a variety of technologies including simple network management protocol, extended markup language or web servers within, embedded into, or associated with, the devices. The device data may be stored in a network database.

In various exemplary embodiments, at the same time that the networked device data is gathered from the networked devices, the systems and methods according to this invention generate graphical, textual, statistical metric and/or status information using the networked device data from the underlying network database.

In various exemplary embodiments, at the same time this information is generated, the generated information is assembled and presented to a multiple users and/or assembled in a Web browser for on-demand display.

Various exemplary embodiments of the systems and methods according to this invention are based on recognition of problems in a real-time concurrent web-application, e.g., spanning numerous technologies, and resolving concurrency and contention issues between multiple users, and resolving concurrency of changing data, so that the data integrity is improved or preserved.

In various exemplary embodiments, the systems and methods according to this invention use Web objects that include explicit relationships between each of the Web-objects so that communication between the Web objects is accomplished using events and a fixed set of rules associated with the Web objects. These relationships and rule enforcement allow the systems and methods according to this invention to be created in a regular manner without needing to have to deal with lower level and more complex details, such as database locking. These built-in rules simplify the creation of applications.

In various exemplary embodiments of the systems and methods according to this invention, each of the template Web objects can be separately created, for example, manually or with a web page authoring tool. The Web objects are combined and populated dynamically from the appropriate Web-object states for display as a Web page by the Web browser. In various exemplary embodiments, the presentation

of a Web object is separated from its content by placing layout and appearance instructions in templates.

In various exemplary embodiments according to this invention, a framework is provided for developing Web applications. This framework is distinct from the Web applications themselves, which are created within and executed by the framework. The framework according to this invention should be contrasted with ad-hoc, informal methods for creating Web applications that have no formal framework or rules to constrain the behavior of the Web applications. Various exemplary embodiments according to the framework of this invention provide concurrent Web-based networked-device metric display, analysis and management.

By providing a formal approach, various exemplary embodiments of the systems and methods according to this invention enhance Web application behavior in important respects, for example, concurrent request management. A Web application resulting from the formal approach according to various exemplary embodiments of the systems and methods of this invention is easier to understand and maintain. Further, in various exemplary embodiments of the systems and methods of this invention redesigning of Web applications is simplified and Web application behavior is more predictable.

These and other features and advantages of this invention are described in, or are apparent from, the following detailed description of various exemplary embodiments of the systems and methods according to this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Various embodiments of this invention will be described in detail, with reference to the following Figures, wherein:

Fig. 1 is a functional block diagram illustrating a first exemplary embodiment of a metrics and status presentation system according to this invention;

Fig. 2 is a functional block diagram illustrating an exemplary remote device for which metrics and status data are presented by the system of Fig. 1;

Fig. 3 is a functional block diagram illustrating an exemplary data processor of the system of Fig. 1;

Fig. 4 is a functional block diagram illustrating an exemplary Web-object presentation creator of the system of Fig. 1;

Fig. 5 is a functional block diagram illustrating an exemplary Web client of the system of Fig. 1;

Fig. 6 is a flowchart outlining an exemplary embodiment of a method for presenting metrics and status information according to this invention;

5 Fig. 7 is a functional block diagram illustrating an exemplary Web and network environment of Web objects according to this invention, including multiple devices, Web clients and Web-object templates with their own state machines, events and embedded Web objects;

10 Fig. 8 is a functional block diagram illustrating a single Web object and a single Web client according to the Web and network environment of Fig. 7;

Fig. 9 is a functional block diagram illustrating multiple Web objects and multiple Web clients according to the Web and network environment of Fig. 7;

Fig. 10 is a functional block diagram illustrating an exemplary implementation of a metrics and status presentation system according to this invention;

15 Fig. 11 shows a first exemplary embodiment of a Web-page presentation of a Web object containing a backing state machine and populated with simple HTML text; and

20 Fig. 12 shows a second exemplary embodiment of a Web-page presentation of a Web object with its backing state machine containing an embedded Web object and its supporting state machine.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

25 According to various exemplary embodiments of this invention, a framework is provided for developing Web applications. This framework provides a runtime or virtual machine for Web objects. According to various exemplary embodiments of this invention, Web objects are template-driven mechanisms that compose Web pages through the use of objects, concurrent state-machines, events and actions within states. The Web objects define explicit relationships between each of the concurrent state-machines, events and actions within states. The Web objects provide a persistent state-machine view of Web-application components.

30 Events enable messages and/or information to be sent to Web objects. Web objects can receive events from external sources, for example, Web browsers, or from other Web objects. In various exemplary embodiments, each Web object can include data and/or can specify a destination.

09748493 112400

States of a Web object provide a history of past events, allowing the Web object to modify the response of that Web object to a new event based on the history of past events of that Web object. Thus, in various exemplary embodiments, the Web objects are able to receive and transmit events that can cause the Web objects to change state and perform actions associated with that state.

In various exemplary embodiments, actions defined within a Web object specify how the Web object will react to events that are received by the Web object. For example, events may cause the Web object to modify data contained within that Web object and/or within other Web objects. Alternatively, or additionally, events may cause that Web object to change state and/or generate an event. The generated event may be transmitted to an external entity, such as a Web browser, or to another Web object. For example, a Web object's actions within a state may gather read and write data from one or more external devices and then display that data on a Web browser, write to other Web objects, and/or write to the external devices.

In various exemplary embodiments of the systems and methods according to this invention, the Web-object systems include a mechanism for Web-object persistence. This persistence mechanism allows a Web object to maintain its state over time independently of any requests that the Web object receives. For example, the state of the Web object may be stored in a permanent storage mechanism, such as an underlying database.

According to various exemplary embodiments of this invention, the Web-object systems also include an event dispatcher as part of it's runtime software.. The event dispatcher places events onto a queue and transmits each event in a predictable manner to the destination specified by that particular event. For example, as events are generated by external sources, such as HTTP requests from Web browsers, the events are placed into the event queue in the order the events are generated. The event dispatcher transmits each event from the event queue to the specified destination that receives the event and its data.

According to various exemplary embodiments of the systems and methods according to this invention, the Web-object systems also include a locking mechanism. This locking mechanism ensures that Web objects correctly make the appropriate transitions between states, and that actions performed within a state are not interrupted. This reduces possible corruption of data and/or actions by other

actions, events and/or Web objects. Thus, in various exemplary embodiments of the systems and methods according to this invention, the locking mechanism does not allow a Web object to be interrupted by other events while the Web object is changing states and/or performing actions. The Web object can process further events only
 5 after the Web object has changed its state and/or completed its action. State changes of Web objects are thus atomic so that they cannot be interleaved or interrupted by other events and state changes in the same Web object or other Web objects and the data to which they are related, and must complete in their entirety. The Web-object runtime component of the systems and methods according to this invention manages
 10 the details required to ensure atomicity so that the Web objects need not separately implement atomicity.

In various exemplary embodiments of the systems and methods according to this invention, the Web-object systems also include a template creation system or device that provides one or more external representations of Web objects, such as, for
 15 example, a Web page coded in HTML. The external representation of a Web object may be persistent so that the representation does not need to be regenerated continuously. That is, rather than the entire external representation being regenerated, only those Web objects that require updating need to be regenerated.

In various exemplary embodiments of the systems and methods according to this invention, the Web-object systems allow the creation of larger, more complex concurrent communicating Web objects from individual Web objects, by combining the representations of the individual Web objects into larger representations.

The presentation systems and methods associated with this invention are further described in copending U.S. Patent Application No. (Attorney Docket
 25 No. 105730), filed herewith and incorporated herein by reference in its entirety.

Fig. 1 shows a functional block diagram of a first exemplary embodiment of a metric and status presentation system 100 according to this invention. As shown in Fig. 1, components of the metric and status presentation system 100 may
 30 communicate via a distributed network 101. The distributed network 101 may be, for example, an intranet, an extranet, a local area network, a metropolitan area network, a wide area network, a satellite communication network, an infrared communication network, the Internet, the World Wide Web, or any other known or later-developed distributed network.

09718493 112400

The metric and status presentation system 100 includes at least one remote device 200. In various embodiments, the remote device 200 comprises one or more devices such as networked copiers, printers, facsimile machines, multifunction devices or any other known or later-developed network-connectable device. The metric and status presentation system 100 also includes a data processor 300, a Web-object presentation creator 400, and at least one Web client 500. In various embodiments of this invention, metrics and/or status data about the remote device 200 are gathered and processed by the data processor 300 and then transmitted to the Web-object presentation creator 400. The Web-object presentation creator 400 accesses and/or creates a presentation, for example, a Web page, from data processed by the data processor 300 and/or contained in templates. The presentation is created as requested by the Web client 500.

Fig. 2 illustrates an exemplary embodiment of the remote device 200 shown in Fig. 1. As shown in Fig. 2, the remote device 200 includes a controller 210, a memory 220, an input/output interface 230 and a simple network management protocol management information base (SNMP MIB) 240. In the exemplary embodiment shown in Fig. 2, the remote device 200 may also include one or more sensors 250, an analog-to-digital converter 260 and/or a preliminary analysis circuit or routine 270. The elements of the remote device 200 may be interconnected by a link 201. The link 201 can be one or more wired or wireless links or any other known or later-developed element or elements that are capable of supplying electronic data to and from the connected elements 210-270.

The input/output interface 230 may be any known or later-developed mechanism, such as a server or a client, that is capable of posting data from the remote device 200 over the distributed network 101 and receiving data from remote devices connected to the distributed network 101. Similarly, the sensors 250 may be any known or later-developed mechanism or mechanisms that are capable of detecting data pertaining to the remote device 200.

In operation, data pertaining to the remote device 200, such as metrics and status data, is collected by the controller 210 from one or more of the memory 220, the one or more sensors 250, and/or any other data sources providing the types of data described above and derived from the operational characteristics of the remote device 200. The data is processed by the controller 210 into a format recognizable by the

preliminary analysis circuit or routine 270 and forwarded to the preliminary analysis circuit or routine 270. For example, the controller 210 may process the collected data by discretely sampling the analog data received from the one or more sensors 250 into qualitative values or by digitizing such analog data using the analog-to-digital converter 260. Alternatively, the controller 210 may process the collected data by translating device signals into discrete event sequences, as described in U.S. Provisional Application No. 60/154,016, incorporated herein by reference in its entirety, that can be recognized by the preliminary analysis circuit or routine 270.

While some data processing may be accomplished by the remote device 200, the data is further processed by the data processor 300 of the metric and status presentation system 100. Fig. 3 illustrates an exemplary embodiment of the data processor 300 shown in Fig. 1. As shown in Fig. 3, in various exemplary embodiments, the data processor 300 includes one-or more Web objects 310 that collect data from the remote device 200. The Web objects 310 collect the data using a standard network management or Web-protocol 320, such as SNMP, HTML over HTTP or extended mark-up language (XML) over HTTP, from the distributed network 101. The data processor 300 also includes a network input/output interface 330 usable to receive and/or send data over the distributed network 101. The elements of the data processor 300 may be interconnected by a link 301. The link 301 can be one or more wired or wireless links or any other known or later-developed element or elements that are capable of supplying electronic data to and from the connected elements 310-330.

The network input/output interface 330 may be any known or later-developed mechanism, such as a server or a client, that is capable of accessing data about the remote device 200 posted over the distributed network 101 and/or sending data over the distributed network 101. The operation of the Web objects 310 is explained in more detail below.

Fig. 4 illustrates an exemplary embodiment of the Web-object presentation creator 400 shown in Fig. 1. As shown in Fig. 4, in various exemplary embodiments, the Web-object presentation creator 400 includes, or at least accesses, one or more Web objects 410 to be presented. The Web-object presentation creator 400 includes one or more templates 420 that can be populated by one or more of the Web objects 410. The templates 420 may be used by a Web server 440 to create a presentation of

one or more of the Web objects 410, such as a Web page, that can be sent over the distributed network 101. The Web-object presentation creator 400 includes a network input/output interface 430 usable to receive and/or send data over the distributed network 101. The elements of the Web-object presentation creator 400 may be interconnected by a link 401. The link 401 can be one or more wired or wireless links or any other known or later-developed element or elements that are capable of supplying electronic data to and from the connected elements 410-440. The network input/output interface 430 may be any known or later-developed mechanism, such as a server or a client, that is capable of accessing the data about the Web objects 410, or the Web objects 410 themselves, and sending the presentation over the distributed network 101. The operation of the Web-object presentation creator 400 is explained in more detail below.

It should be understood that the Web objects 410 shown in Fig. 4 can be the same elements as the Web-objects 310 shown in Fig. 3. Thus, while the data processor 300 and the Web-object presentation creator 400 are shown separately, it should be understood that the data processor 300 and the Web-object presentation creator 400 may be embodied in the same device and/or software. The distinction between the data processor 300 and the Web-object presentation creator 400 is for the sake of description only and is not limiting.

Fig. 5 illustrates an exemplary embodiment of the Web client 500 shown in Fig. 1. As shown in Fig. 5, in various exemplary embodiments, the Web-client 500 includes a controller 510, a memory 520, an input/output interface 530, a data storage device 540 and a display device 550. The elements of the Web-client 500 may be interconnected by a link 501. The link 501 can be one or more wired or wireless links or any other known or later-developed element or elements that are capable of supplying electronic data to and from the connected elements 510-550.

The input/output interface 530 may be any known or later-developed mechanism, such as a server or a client, that is at least capable of receiving data from the distributed network 101.

In operation, the memory 520 may contain a Web browser application executed by the controller 510. A request from the Web browser is sent over the distributed network 101 by the input/output interface 530. The request causes the presentation of one or more of the Web objects 310 and/or 410 and/or the templates

420 to be provided to the Web client 500. The Web objects 310 and/or 410 and/or the templates 420 may be displayed to a user on the display device 550. The Web objects 310 and/or 410 and/or the templates 420 may also be stored by the data storage device 540 and displayed later. The controller 510 may also generate periodic requests to
5 update the retrieved Web objects 310 and/or 410 and/or the templates 420. Thus, current data pertaining to the remote device 200, such as metrics and status data, may be displayed to the user on request as the presentation of one or more of the Web objects 310 and/or 410 and/or the templates 420.

Fig. 6 is a flowchart outlining an exemplary embodiment of a method for
10 presenting metrics and status data according to this invention. Beginning in step S100, control continues to step S200, where data, such as metrics and status data, is collected from one or more remote devices. The remote devices may be networked devices and the data may be retrieved using a standard network management protocol, or a proprietary, device-specific, manufacturer-specified protocol or a manufacturer-
15 specified protocol. In various embodiments of this invention, the data is polled on a regular or irregular interval from the remote devices. Alternatively, or additionally, the data may be polled on demand. Next, in step S300, the collected data is transmitted to one or more persistent Web objects. Control then continues to step S400.

20 In step S400, the transmitted data is processed. As discussed below, in various embodiments, the data is processed by the one or more Web-objects. For example, activities such as determining running totals, updating graphs, altering existing spreadsheets and the like may be involved. Then, in step S500, the processed data is stored, for example, in one or more of the Web objects for later retrieval. Next, in
25 step S600, the stored data is accessed. The data may be accessed automatically or may be accessed upon request, for example, a request by a Web client that presents metrics and/or status data. Control then continues to step S700.

In step S700, one or more templates are created and/or updated using the accessed data. In various embodiments of this invention, the templates are populated
30 by one or more of the Web objects and thus form a representation of the Web objects. The created and/or updated templates may be stored for later presentation. Next, in step S800, the created and/or updated templates are accessed. For example, the templates may be accessed by a Web server. Then, in step S900, one or more Web

pages are created and/or updated using the templates. In various embodiments of this invention, the template-based representations are combined with other template-based representations. The created and/or updated Web pages define a presentation of the data from the remote device, such as metrics and status data, and are available for viewing by one or more Web clients, for example, over a distributed network.

Control then continues to step S1000, where the process ends. While these processing steps are shown executing serially, the procedures may actually execute concurrently in parallel in each of elements in 100, 200, 300, 400 and 500. As shown in Figs. 7-10, the integrity of the data is maintained throughout the process.

Fig. 7 is a functional block diagram illustrating an exemplary Web and network environment 7000 of Web objects according to this invention, including multiple networked devices 7200, a data processor/Web-object presentation creator 7300 and multiple Web clients 7500, all interconnected by a network 7100, such as the Internet. The data processor/Web-object presentation creator 7300 includes multiple Web objects 7310, 7320 and 7330. Each Web object 7310, 7320 and 7330 has its own templates 7312, 7322 and 7332, and state machines 7314, 7324 and 7334, respectively. The data processor/Web-object presentation creator 7300 also includes a database 7340, or other data storage device, and one or more runtime support circuits, routines or managers 7350. The data processor/Web-object presentation creator 7300 may be embodied as any suitable computer-based device, such as, for example, a Web server.

The Web clients 7500 may be embodied as any device that is capable of receiving information from the network 7100 and displaying the information to a user. For example, the Web clients 7500 may be workstations 7510, such as personal computers, that each include a monitor or screen display 7520. It should be understood, however, that the Web-clients 7500 may be other devices, such as a hand-held personal digital assistant (PDA), a cellular or digital mobile telephone or an embedded web browser in a consumer appliance, such as a CD player, DVD player, or microwave oven.

In operation, one or more of the Web clients 7500 generate and transmit a request for information over the network 7100. For example, the workstations 7510 may access hyperlinks displayed in a web browser. The request is received by the data processor/Web-object presentation creator 7300 and processed by one or more of

the Web-objects 7310, 7320 and/or 7330 using the state machines 7314, 7324 and/or 7334, respectively. State data for the state machines 7314, 7324 and 7334 is read from and stored in the database 7340. Rules and mechanisms for operation of the Web objects 7310, 7320 and/or 7330 and their state machines 7314, 7324 and/or 7334 are provided by the runtime support circuits, routines or managers 7350.

Data from the networked devices 7200 is transmitted to the data processor/Web-object presentation creator 7300, either automatically or as requested by the data processor/Web-object presentation creator 7300, and stored in the database 7340 for use by the Web objects 7310, 7320 and/or 7330 in their state machines 7314, 7324 and/or 7334. The Web objects 7310, 7320 and/or 7330 create and populate the templates 7312, 7322 and/or 7332 with data from the state machines 7314, 7324 and 7334 and/or the database 7340. The templates 7312, 7322 and/or 7332 are then transmitted in a proper format, such as HTML, XML, XHTML, PDF, or any other appropriate known or later-developed format, to the Web clients 7500, either individually or combined, to form a desired presentation of the requested information. For example, the requested information may be presented on the screen display(s) 7520 as a Web page formed by representations of the Web objects 7310, 7320 and/or 7330 or displayed objects 7521, 7522 and/or 7523.

Fig. 8 is a functional block diagram illustrating a single Web object 7310 and a single Web client 7530 according to the Web and network environment 7000 shown in Fig. 7. The request for information by the Web client 7530 is transmitted to the Web object 7310 over the network 7100 and received as an Event 1. The Web object 7310 is in a State 1, a definite state, when the Event 1 is received. This definite state reflects the past history of the Web object 7310. The state machine 7314 is shown in abstract form as an event/state diagram to illustrate the reaction of the Web object 7310 to events based on the past history of events.

When the Web object 7310 receives the Event 1, the state machine 7314 produces one or more actions within that state, such as an Action 1. For example, the Action 1 may be receiving and manipulating remote device data for display, storing data in a database, or sending email to a device event subscriber. After the Web object 7310 completes the Action 1, the Web object 7310 changes state from the State 1 to a State 2.

The runtime support circuit, routine or manager 7350 ensures that the Web object 7310 processes the Event 1 automatically so that the processing cannot be interrupted. In other words, the Web object 7310 is not allowed to process another event until the Event 1 is processed and the Web object 7310 changes from the State 1 to the State 2.

In the State 2, the state machine 7314 may produce an Action 2 and/or an Event 2. When the Web object 7310 completes the Action 2, the Web object 7310 changes from the State 2 to a State 3. Depending on the past history of the Web object 7310, various events are created and processed and various actions are executed. The runtime support circuit, routine or manager 7350 manages the processing by creating an event queue that operates on a first-in-first-out basis. The event queue may be managed by an event dispatcher, which transmits events from the queue to specified destinations in the order in which they are received, providing a guaranteed event delivery system, so that Web objects do not have to implement or reinvent this functionality. Using the state machine 7314, the Web object 7310 updates itself automatically so that the remote device data displayed as the displayed object 7521 to the Web client 7530 is current.

Fig. 9 is a functional block diagram illustrating multiple Web objects 7324 and 7334 and multiple Web clients 7540 and 7550 according to the Web and network environment 7000 shown in Fig. 7. The operation of the Web-object system shown in Fig. 9 is identical to the operation of the Web-object system described above with respect to Fig. 8, except that events and/or actions of the Web object 7324 are used to update the Web object 7334, and vice versa. The runtime support circuit, routine or manager 7350 manages the processing of events by the Web objects 7324 and 7334 so that contention and race conditions are avoided when one Web-object's state machine reads or writes the data in another Web object.

Also, the displayed object 7522 generated by the Web client 7540 may be different than the displayed object 7523 generated by the Web client 7550. For example, the information requested by each of the Web clients 7540 and 7550 may be different. Further, the displayed objects 7522 and 7523 may be different in appearance and content because the templates 7322 and 7332, respectively populated by the Web objects 7324 and 7334, may be different.

Fig. 10 is a functional block diagram illustrating an exemplary implementation of a metrics and status presentation system according to this invention. The implementation runs on the Microsoft NT server operating system, under the Oracle Application server environment B which provides Web service facilities to the application. The Web object runtime E is implemented using Java Servlets as supported by the Java servlet cartridge D supplied by Oracle, and an Oracle database J. The runtime is used to execute Web objects implemented as additional Java servlets H. The Web objects communicate with networked printing devices I and poll data from these devices. The web objects use a template parser G to form representations of themselves for display in a Web browser A, using the Web server B for communication with the Web browser A.

Fig. 11 shows an exemplary Web-page presentation of a Web object containing a backing state machine and populated with simple HTML text.

Fig. 12 shows another exemplary Web-page presentation of a Web object with its backing state machine containing an embedded Web object and its supporting state machine.

While this invention has been described in conjunction with the exemplary embodiments outlined above, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, the exemplary embodiments of the invention, as set forth above, are intended to be illustrative, not limiting. Various changes may be made without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A method for communication between a plurality of networked devices in a Web-based management system, comprising:

5 automatically providing networked device information from the networked devices to at least one Web object over a distributed network, wherein each Web object is a self-contained entity with object data, an associated presentation and a state machine lifecycle.

2. The method of claim 1, further comprising processing events using the state machine lifecycle of the at least one Web object.

10 3. The method of claim 2, further comprising communicating between the at least one Web object and at least one other Web object concurrently through events that are processed using the state machine lifecycle of the at least one Web object.

15 4. The method of claim 2, further comprising generating at least one subsequent event in response to a change in state of the state machine lifecycle of the at least one Web object.

5. The method of claim 2, wherein processing the at least one event comprises atomically processing the at least one event.

6. The method of claim 2, wherein processing the at least one event comprises atomically processing actions within a state.

20 7. The method of claim 2, further comprising managing events using an event queue.

8. The method of claim 7, wherein managing events using the event queue comprises receiving events, queuing the received events and transmitting the queued events in order to the at least one Web object.

25 9. The method of claim 2, further comprising receiving, at the at least one Web object, at least one event or data access directly from at least one other Web object.

10. The method of claim 2, further comprising accessing data directly from at least one other Web object by the at least one Web object.

30 11. The method of claim 2, further comprising synchronously receiving events at the at least one Web object.

12. The method of claim 2, further comprising asynchronously receiving events at the at least one Web object.

004211 66487260

10. The method of claim 1, further comprising analyzing the networked device information to obtain data related to the networked device information.

11. The method of claim 10, wherein analyzing the networked device information comprises processing at least one event such that the state machine
5 lifecycle of at least one of the Web objects changes state.

12. The method of claim 2, further comprising providing a runtime that establishes atomicity for the at least one Web object with respect to at least one of events, actions and data that occur in a state of another Web object state machine.

004211 E6481260

ABSTRACT OF THE DISCLOSURE

Web-based event/state-driven mechanisms and methods for simplifying communication between networked multifunction devices, such as copiers, printers, facsimile machines and multifunction devices using a networked database for the creation and presentation of device metrics and status data. Web-based multifunction performance metrics and calculations themselves are created within concurrent (multiple instances) of Web objects, wherein a Web object is a self-contained entity with data and a state machine lifecycle. State changes inside and outside the Web object are made by sending events to event queues and routing them to other state machines within other Web objects or instances of the same Web object. Data and events between Web objects are formed into a regular event syntax providing a simpler method of communication than those of procedural programming approaches. The arguments of the events are processed by specific instances of state machines that compose each Web object to perform an appropriate action. The metrics displays and corresponding calculations within the Web object's state machine are highly self-contained and concurrent, hiding networked database contention and database locking, and enforcing atomicity with it's runtime software. Calculations are performed and displayed from within a very small context within each Web object's state minimizing external communications and further simplifying software application development efforts.

004211 55497260

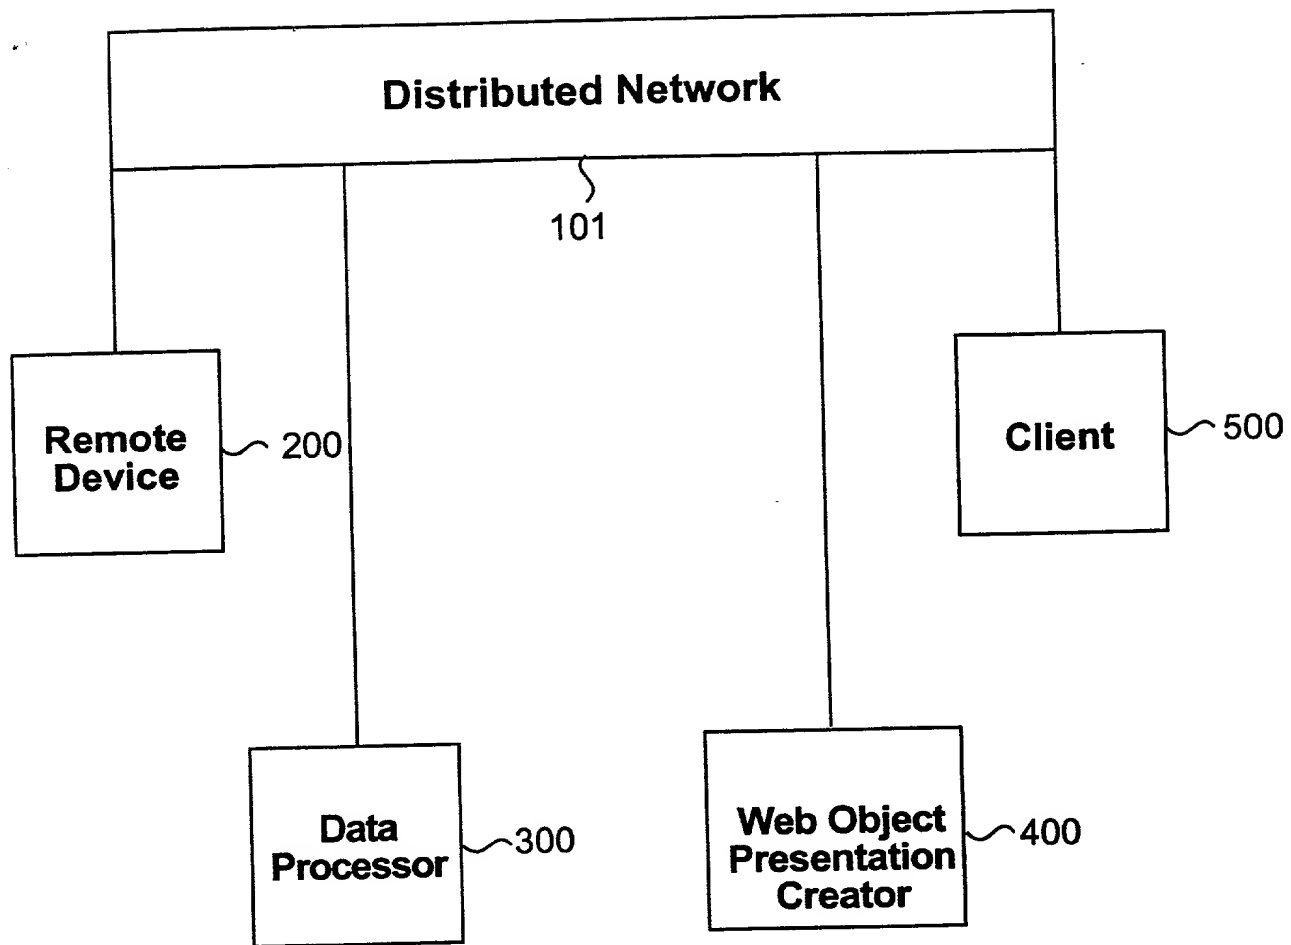


Figure 1.

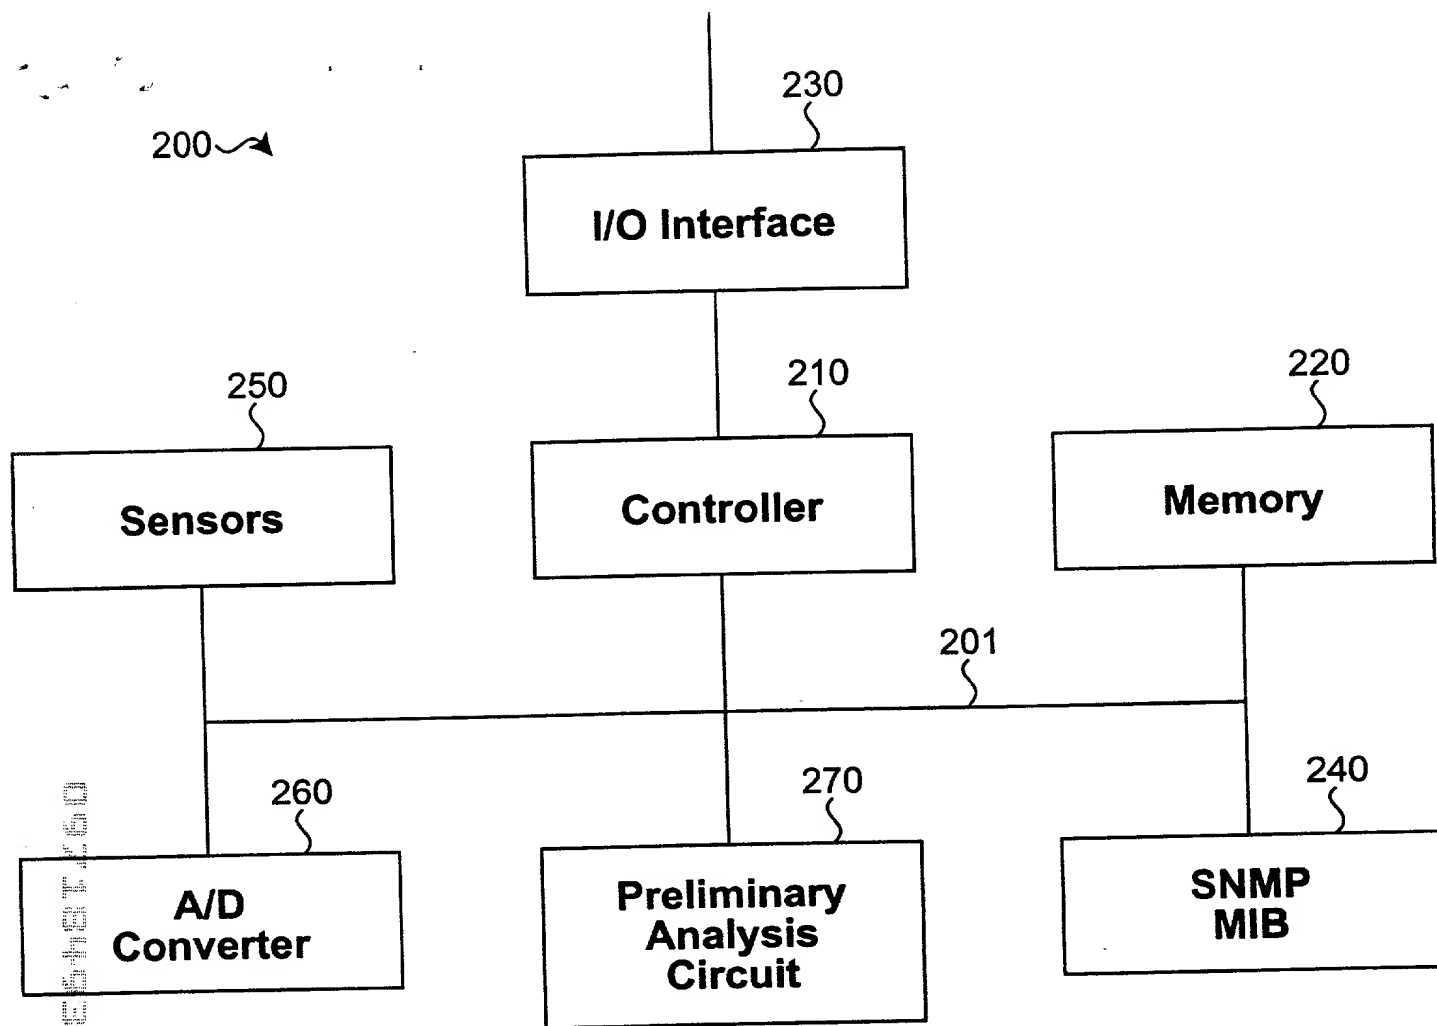


Figure 2.

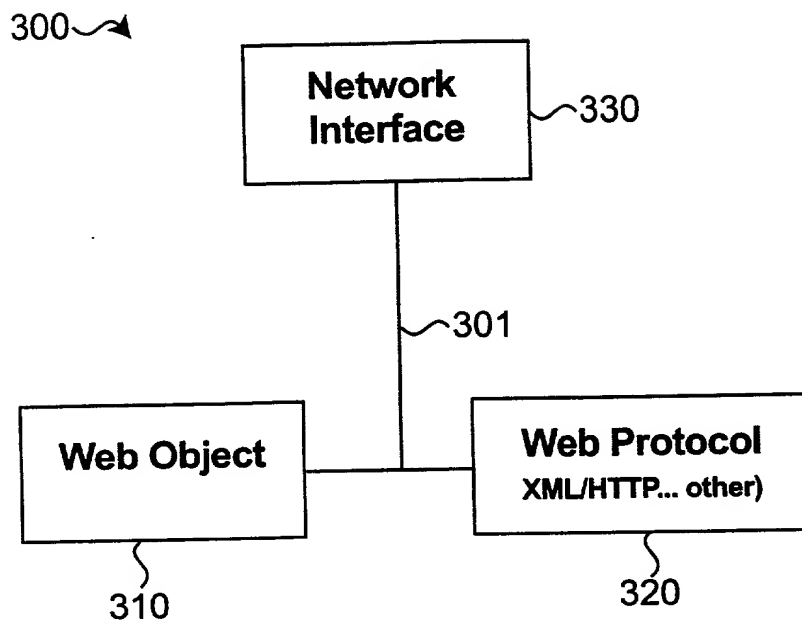


Figure 3

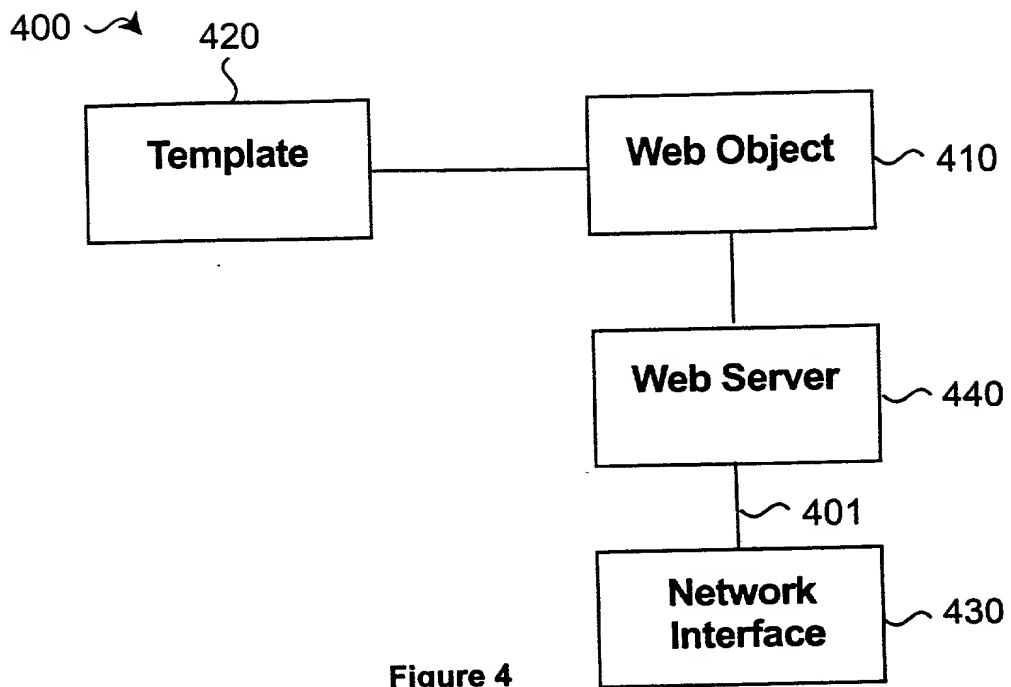


Figure 4

500

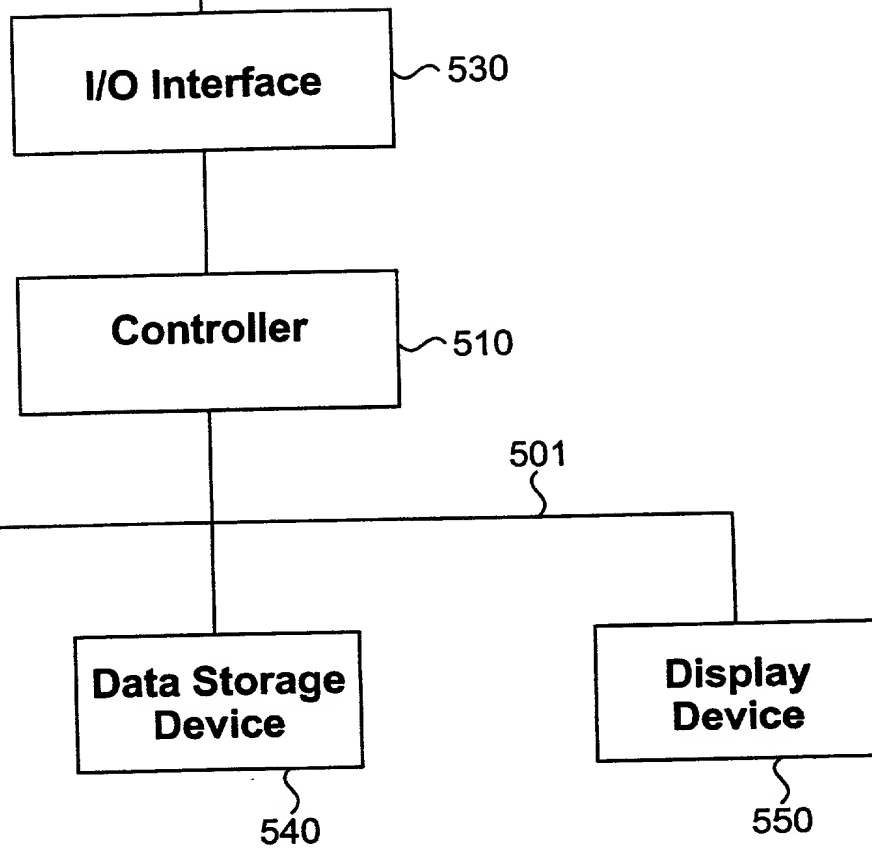


Figure 5

```

graph TD
    S100([BEGIN]) --> S200[Collect Data From Remote Device]
    S200 --> S300[Transmit Collected Data to Data Processing]
    S300 --> S400[Process Data]
    S400 --> S500[Store Data]
    S500 --> S600[Access Stored Data]
    S600 --> S700[Create/Update Template Using Accessed Data]
    S700 --> S800[Access Created/Updated Templates]
    S800 --> S900[Create/Update Web Page Using Created/Updated Templates]
    S900 --> S1000([END])

```

Figure 6

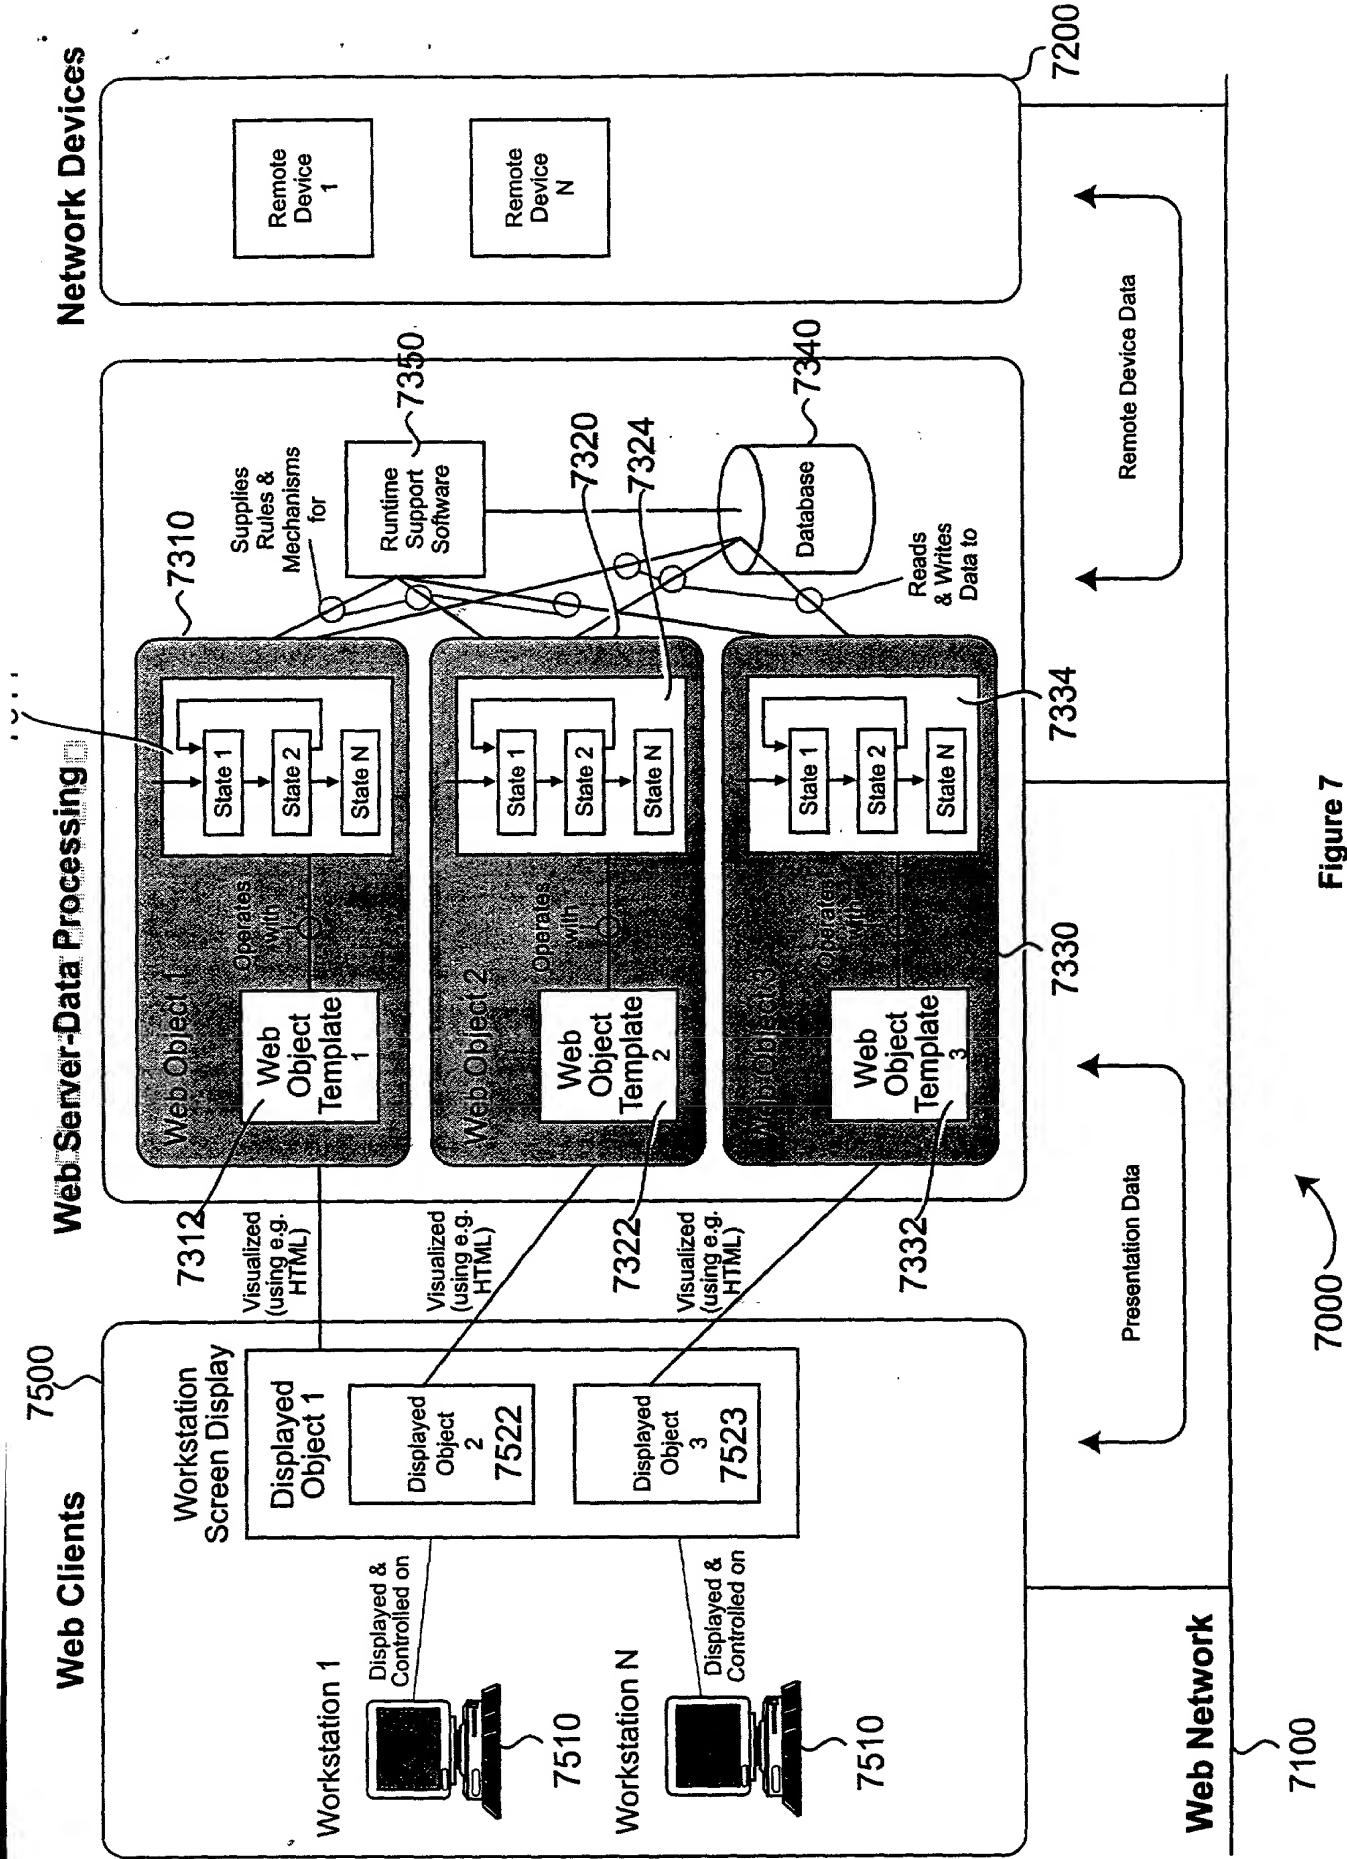


Figure 7

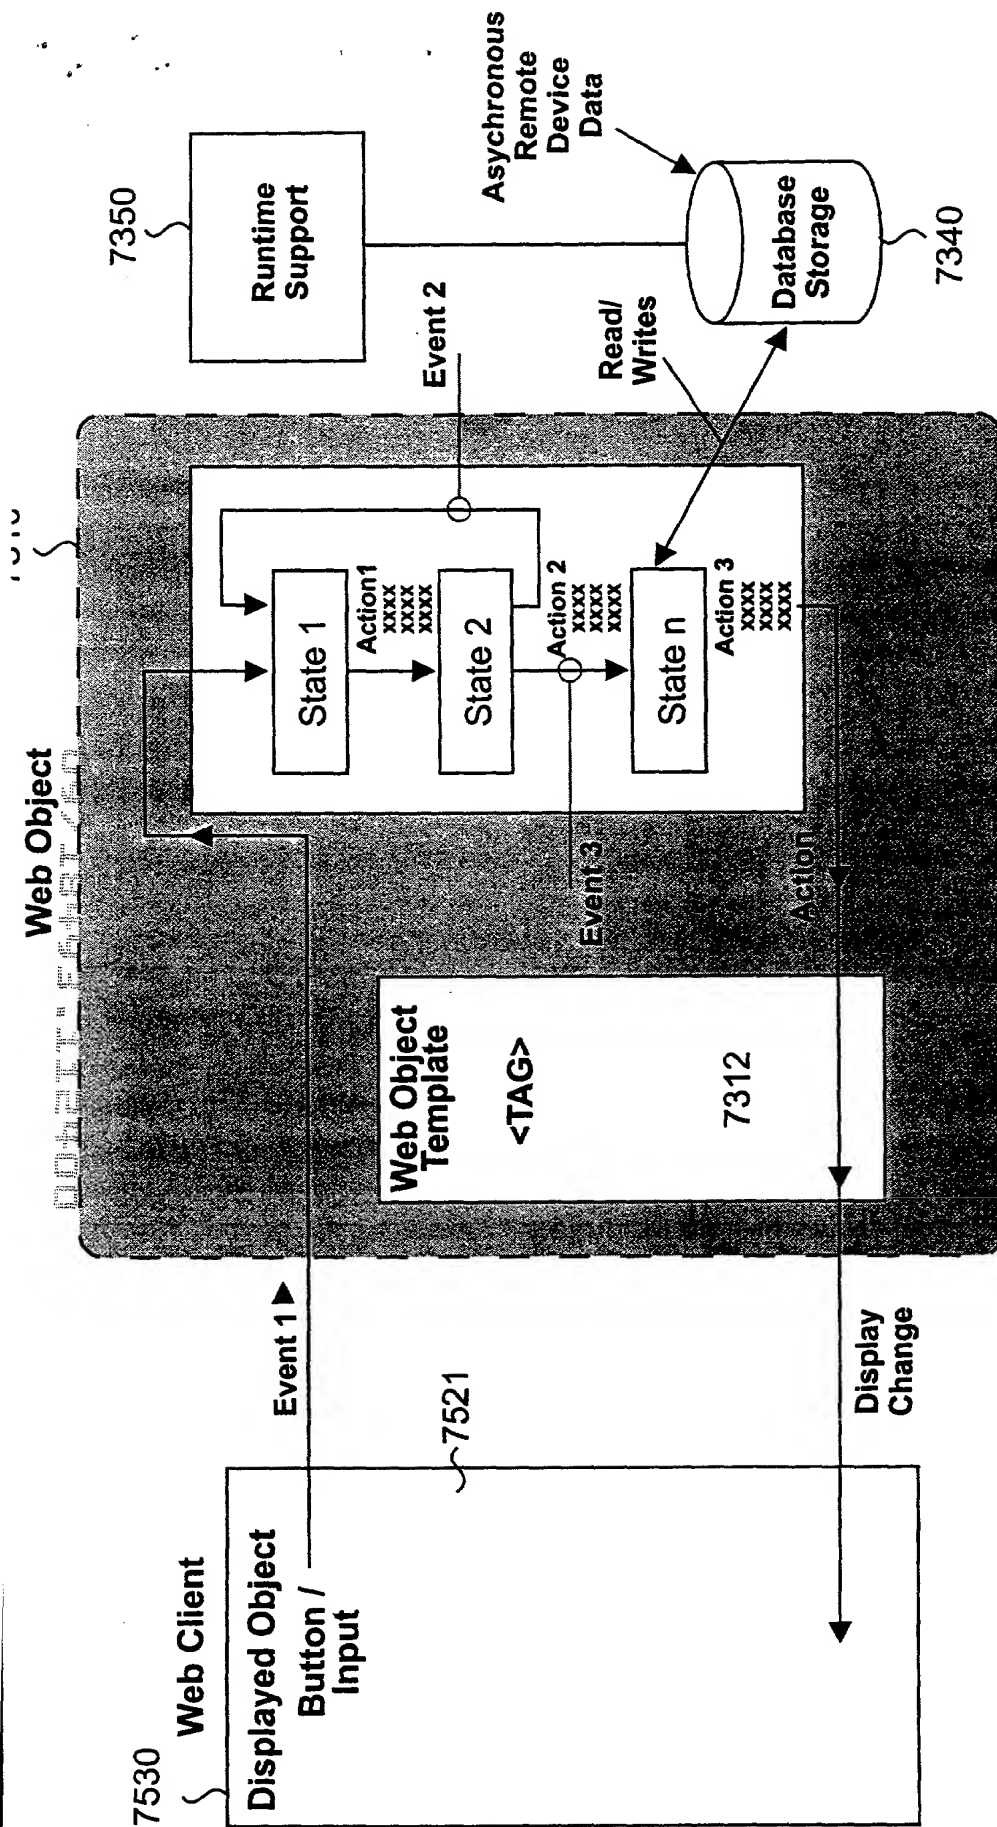


Figure 8

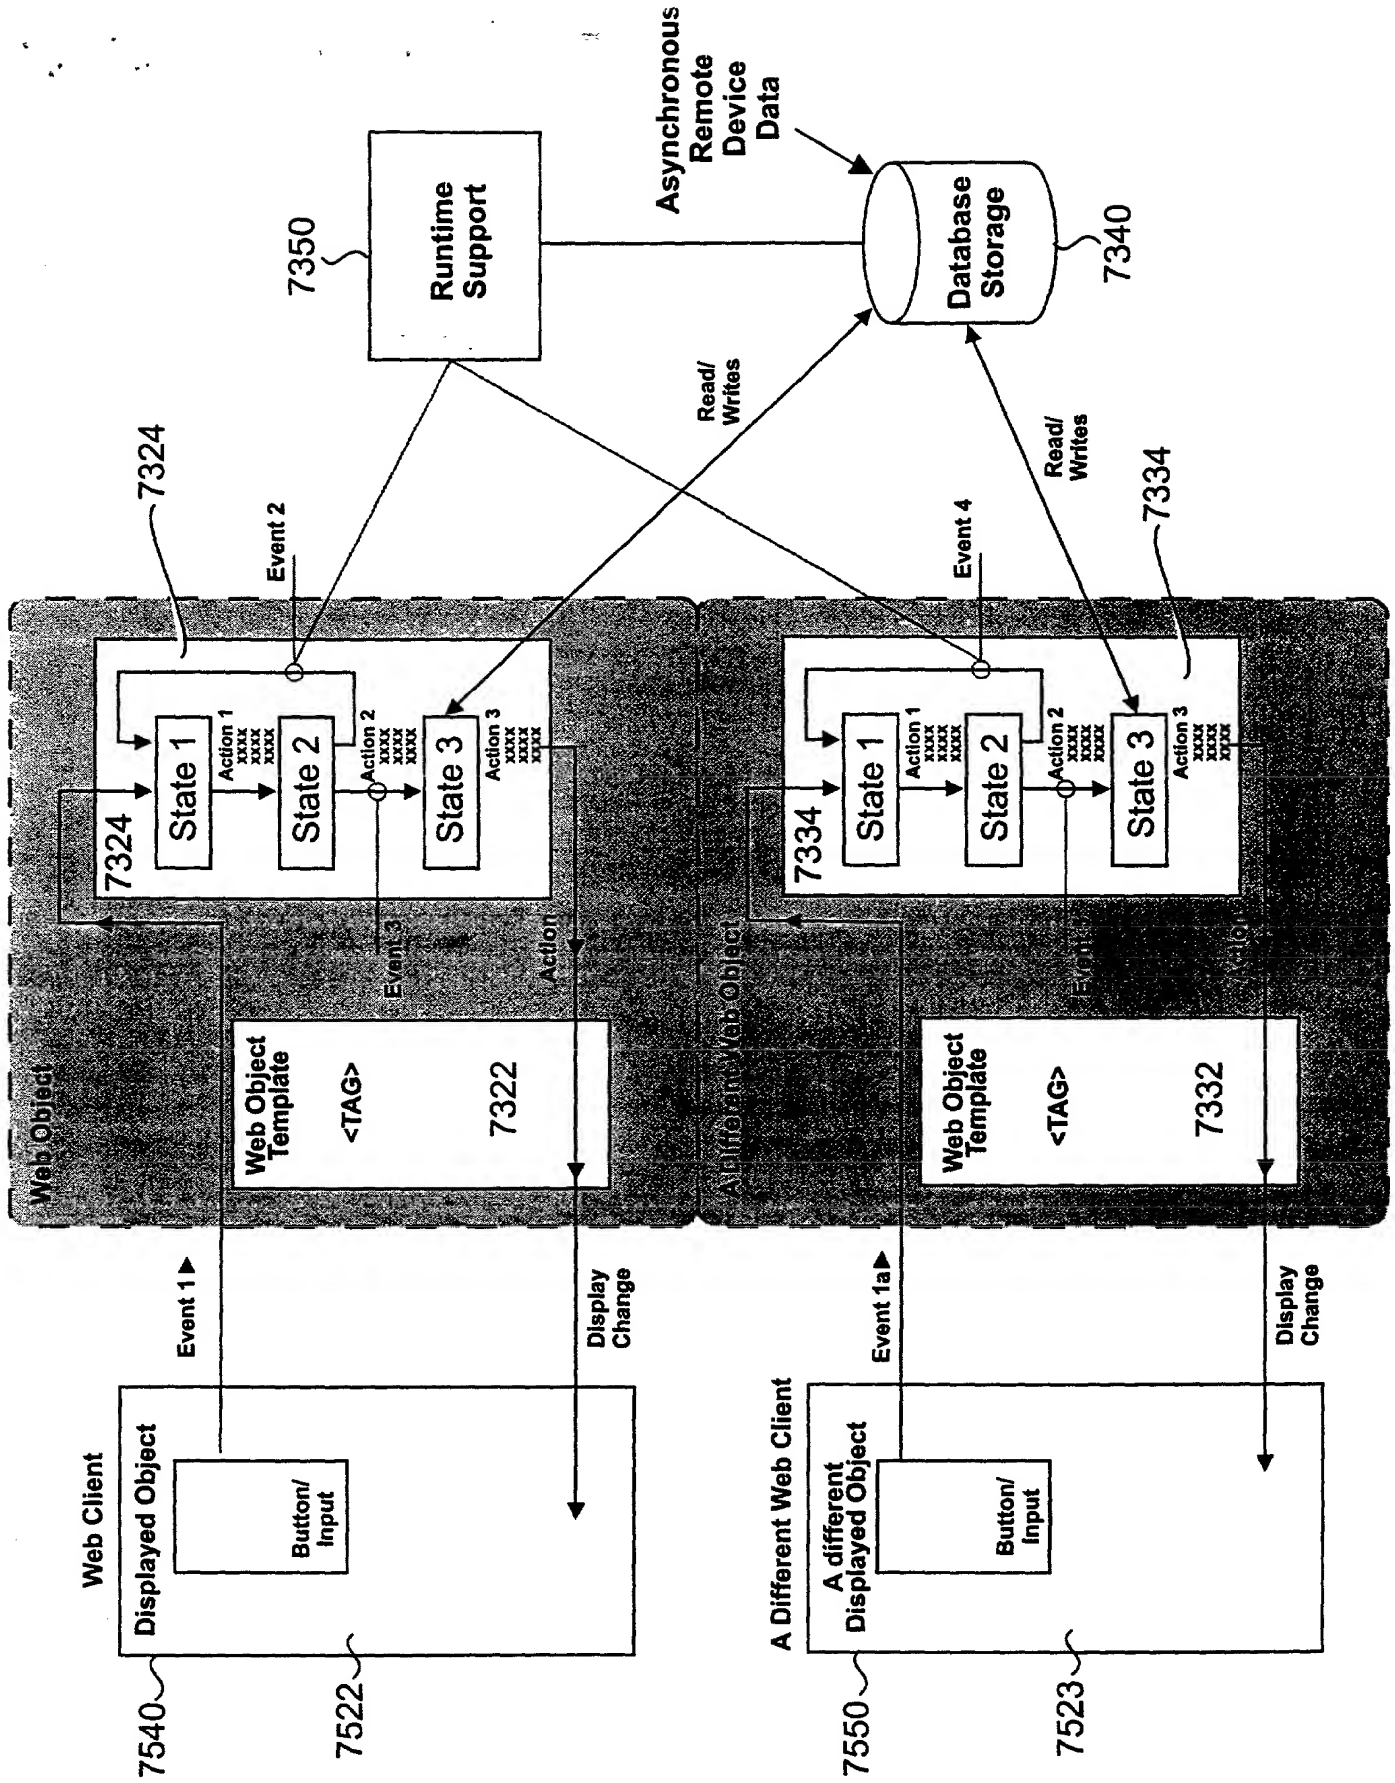


Figure 9

I. Networked Devices e.g. Printers

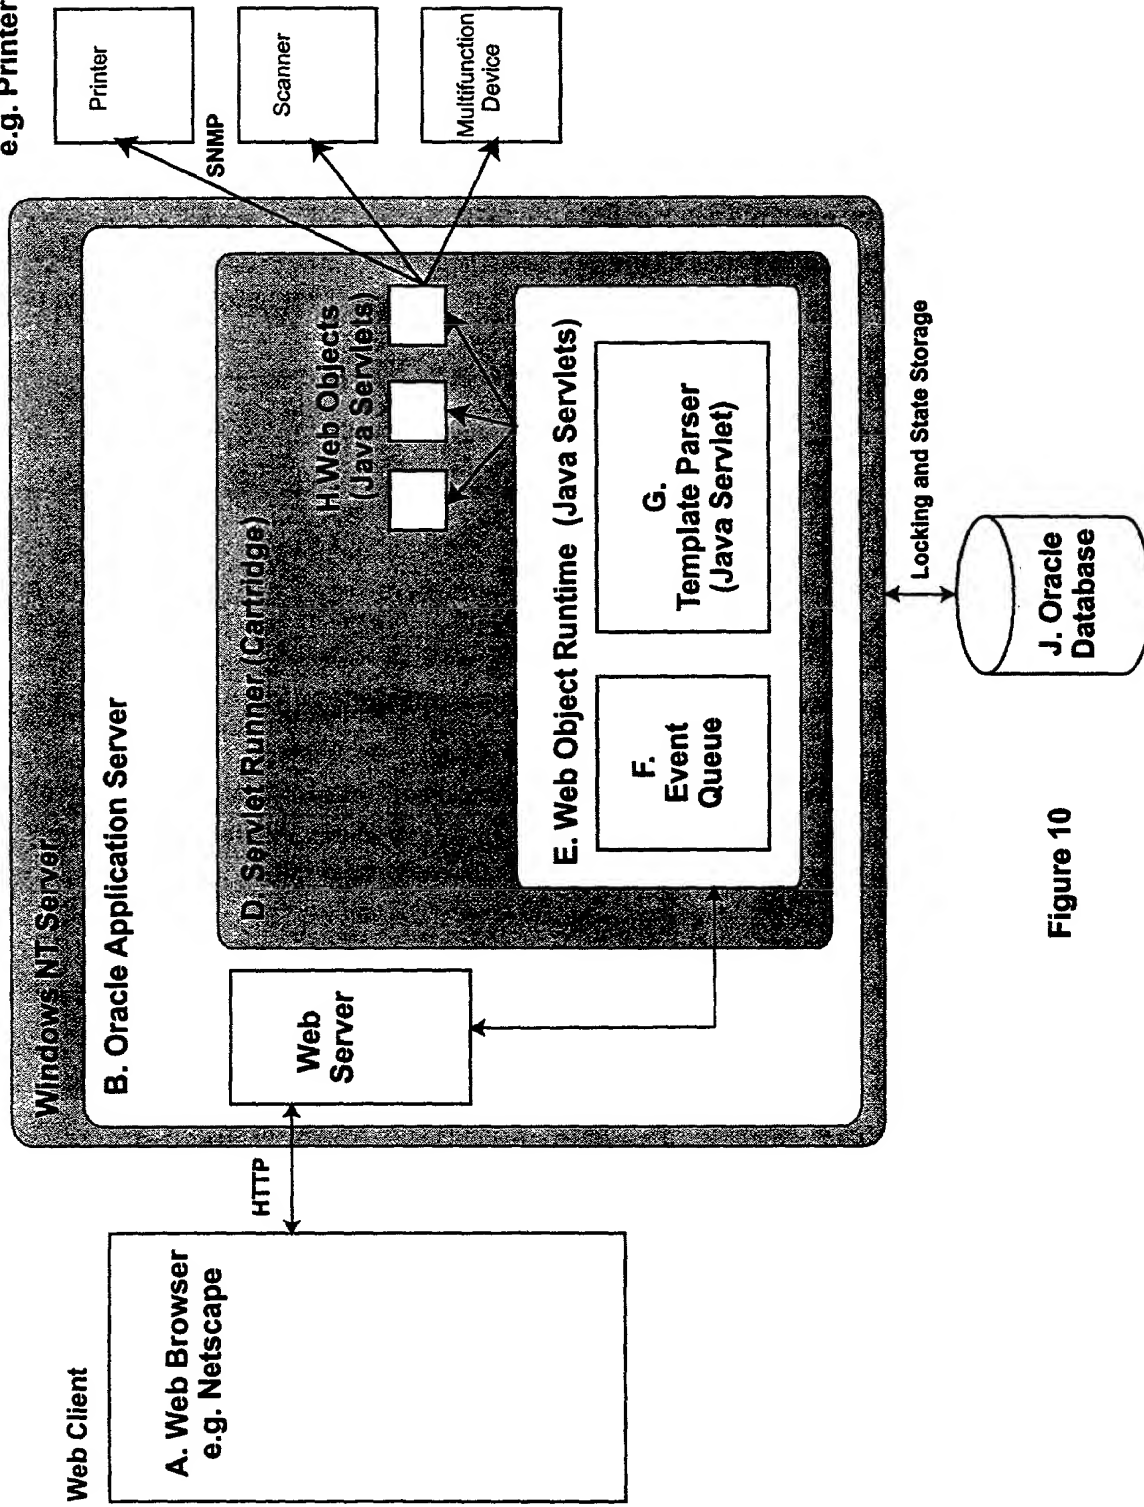


Figure 10

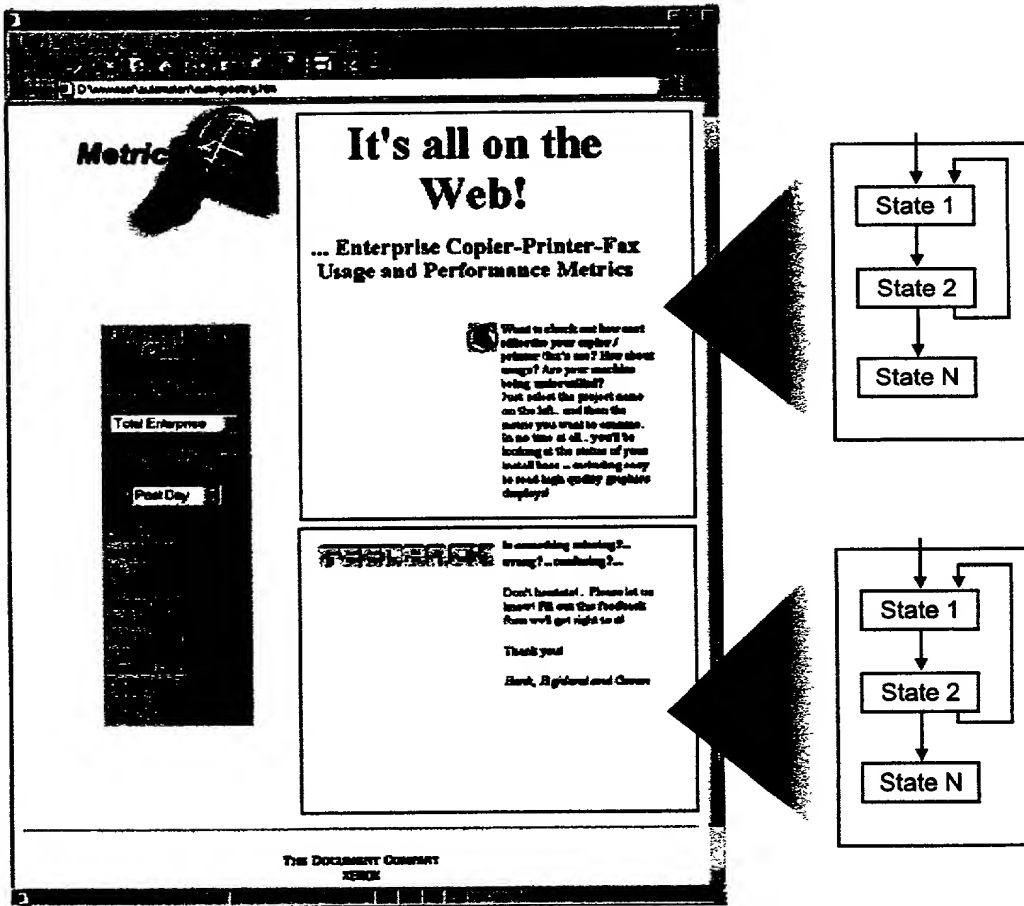


Figure 11

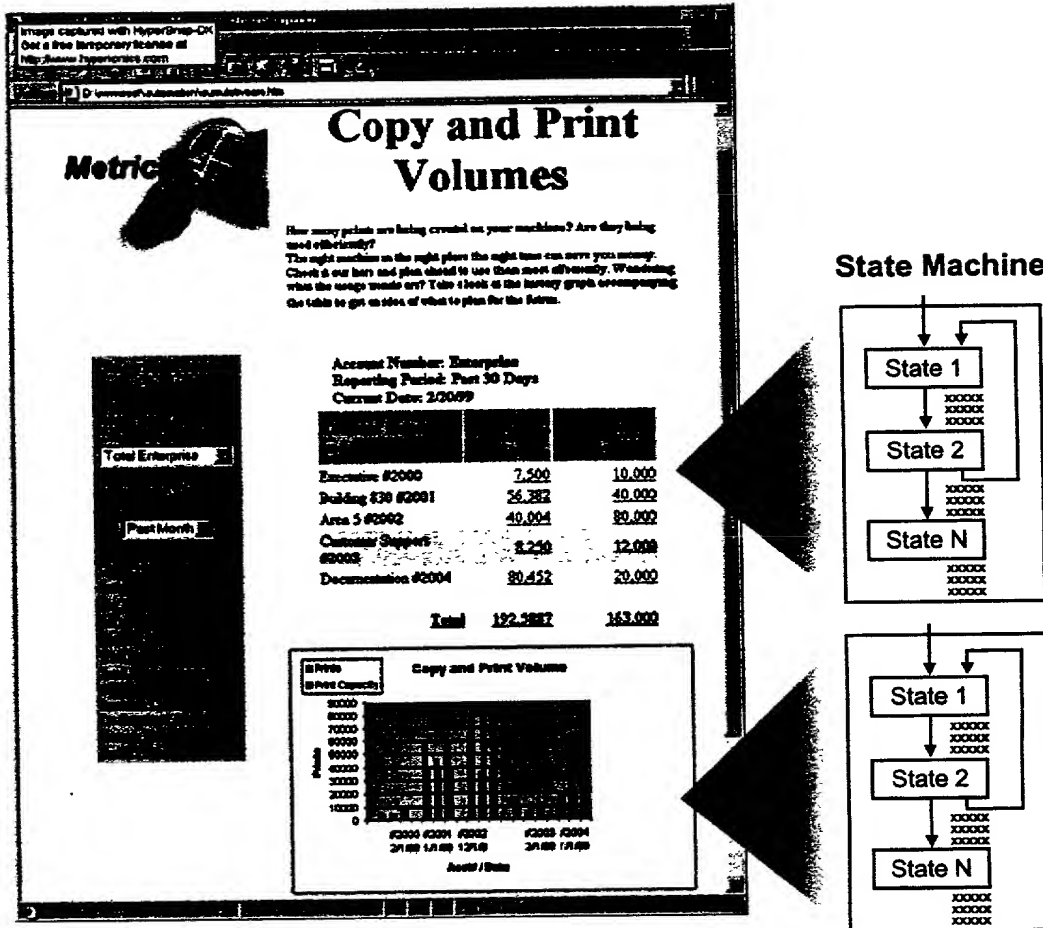


Figure 12

Figure 06

Metrics



Copy and Print Volumes

How many prints are being created on your machines? Are they being used efficiently?
The right machine in the right place the right time can save you money. Check it out here and plan ahead to use them most efficiently. Wondering what the usage trends are? Take a look at the history graph accompanying the table to get an idea of what to plan for the future.

Metrics Display Choices

Select your Account

Total Enterprise

Select your Timeframe

Past Month

Copy/Print Volume

Optimize

Idle Time

Job mtr

Account statistics

Wait time

Total Machine cost per print


Dynamic Cost / Performance Analysis

Feature Usage

Usage Pattern

Account Number: Enterprise
Reporting Period: Past 30 Days
Current Date: 2/20/99

Account Name and #	Actual Number of Prints	Rated Capacity
Executive #2000	7,500	10,000
Building 830 #2001	56,382	40,000
Area 5 #2002	40,004	80,000
Customer Support #2003	8,250	12,000
Documentation #2004	80,452	20,000
Total	192,5887	163,000

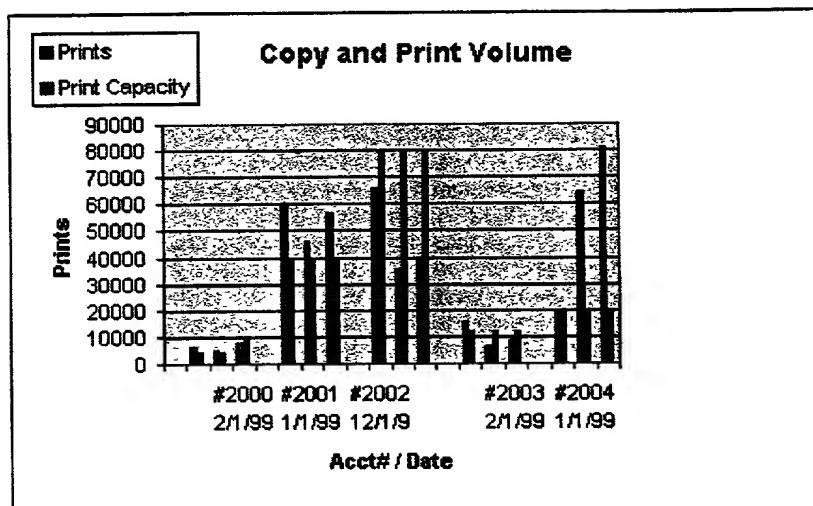

004277-66487/60

Metrics

It's all on the Web!

... Enterprise Copier-Printer-Fax
Usage and Performance Metrics

Metrics Display Choices

Select your Account

Total Enterprise

Select your Timeframe

Past Day

Copy/Print Volume

Uptime

Idle Time

Jobs

Account Statistics

Wait time

Total Machine cost per print

Dynamic Cost

Performance Analysis

Feature Usage

Usage Patterns



Want to check out how cost effective your copier / printer / fax's are? How about usage? Are your machine being underutilized?

Just select the project name on the left.. and then the metric you want to examine. In no time at all... you'll be looking at the status of your install base -- including easy to read high quality graphics displays!

FEEDBACK

Is something missing?... wrong?... confusing?...

Don't hesitate!... Please let us know! Fill out this feedback form we'll get right to it!

Thank you!

Hank, Highland and Gavan

THE DOCUMENT COMPANY
XEROX

My Computer

004277" E6481760

APPLICATION FOR UNITED STATES PATENT
DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MECHANISMS FOR WEB-OBJECT EVENT/STATE-DRIVEN
COMMUNICATION BETWEEN NETWORKED DEVICES

described and claimed in the specification:

Check one

*a. ☒ attached hereto.

b. ☐ filed on _____ as Application No. _____ and amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56. Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) and/or United States provisional application(s) filed by me or my legal representatives or assigns within one year prior to this application are hereby claimed:

None

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

None


I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Registration No. 27,075; William P. Berridge, Registration No. 30,024;
Kirk M. Hudson, Registration No. 27,562; Thomas J. Pardin, Registration No. 30,411;
Edward P. Walker, Registration No. 31,450; Robert A. Miller, Registration No. 32,771;
Mario A. Costantino, Registration No. 33,565; Stephen J. Roe, Registration No. 34,463;
John E. Beck, Registration No. 22,833; Mark Costello, Registration No. 31,342;
Richard B. Domingo, Registration No. 36,784; Henry Fleischer, Registration No. 25,582;
Eugene O. Palazzo, Registration No. 20,881; Denis A. Robitaille, Registration No. 34,098; and
Ronald F. Chapuran, Registration No. 26,402.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & BERRIDGE, PLC, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1 **Typewritten Full Name
of First or Sole Inventor**

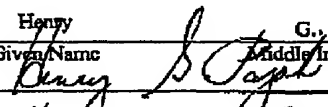	Henry	G.	Pajak
	Given Name	Middle Initial	Family Name
2 **INVENTOR'S SIGNATURE:			
3 **DATE OF SIGNATURE:	11	30	2000
	Month	Day	Year
Residence:	Ontario	New York	USA
	City	State or Province	Country
Citizenship:	USA		
Post Office Address:			
(Insert complete mailing address, including country)	5612 Lincoln Road, Ontario, New York 14519, USA		

*This form may be executed only when attached to the specification (including claims) at the end thereof if Box a. is checked.

**Note to Inventor: Please sign name exactly as it appears above and insert actual date of signing.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒

1 **Typewritten Full Name**
of Second Joint Inventor (if any)

Given Name	Middle Initial	Family Name
Gavan	L	Tredoux

2 ****INVENTOR'S SIGNATURE:**

<i>Gavan</i>	<i>L</i>	<i>Tredoux</i>
--------------	----------	----------------

3 ****DATE OF SIGNATURE:**

11	20	2000
Month	Day	Year

Residence:

Rochester	New York	USA
City	State or Province	Country

Citizenship: IRELAND

Post Office Address:
(Insert complete mailing address, including country)

76 Hewitt Street, Rochester, New York, 14612, USA

1 **Typewritten Full Name**
of Third Joint Inventor (if any)

Given Name	Middle Initial	Family Name
Highland Mary		Mountain

2 ****INVENTOR'S SIGNATURE:**

<i>Highland Mary Mountain</i>		
-------------------------------	--	--

3 ****DATE OF SIGNATURE:**

11	21	2000
Month	Day	Year

Residence:

Phoenix	Arizona	85048
City	State or Province	Country

Citizenship: USA

Post Office Address:
(Insert complete mailing address, including country)

4411 East Chandler, Apartment 2036, Phoenix, Arizona 85048, USA

1 **Typewritten Full Name**
of Fourth Joint Inventor (if any)

Given Name	Middle Initial	Family Name

2 ****INVENTOR'S SIGNATURE:**

--	--	--

3 ****DATE OF SIGNATURE:**

Month	Day	Year

Residence:

City	State or Province	Country

Citizenship:

Post Office Address:
(Insert complete mailing address, including country)

1 **Typewritten Full Name**
of Fifth Joint Inventor (if any)

Given Name	Middle Initial	Family Name

2 ****INVENTOR'S SIGNATURE:**

--	--	--

3 ****DATE OF SIGNATURE:**

Month	Day	Year

Residence:

City	State or Province	Country

Citizenship:

Post Office Address:
(Insert complete mailing address, including country)

****Note to Inventors:** Please sign name exactly as it appears and insert the actual date of signing.
This form may be executed only when attached to the first page of the Declaration and Power of Attorney form and the specification (including claims) of the application to which it pertains.

09718493 112400